


Filler material for NITOHULLMAC XG

NITOHULLMAC XG-M

Outline

NITOHULLMAC XG is clay-like filler material added inert inorganic fillers and thickener etc to liquid rubber and is a supplementary material to be used when putting or winding anti-corrosion tape.

Construction

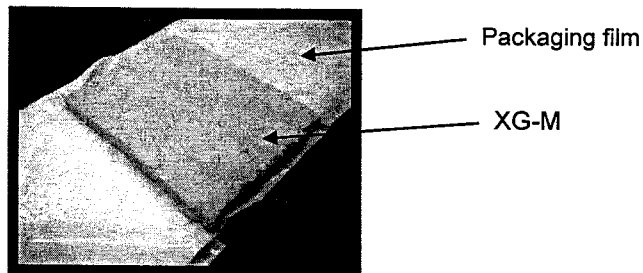

Applications

Gap filler materials for irregular shaped parts like flange or valve

Features

- Workability is good because it is difficult to change the hardness at high or low temp
- Can keep it molded even if at high temp

Standard size

Table1. Standard size

Item	Weight	Size	quantity/case
XG-M	2kg	250 mm×200 mm×25 mm	10pieces

Doc No. ANT-007-0E-1 2014/12/04 1/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

General properties

Table2. General properties

Items	Unit	Measurement value	Test method
Outside appearance	—	White · Block type	—
Weight loss on heating	%	0.11	JIS A 5752
Consistency	—	70	JIS K 2220
Specific gravity	—	1.65	JIS K 6911
Flash point	°C	Over 210	JIS K 2265

Things to be aware of when using

- Molding it to appropriate size conforming with construction object, fill it out into depression or gap parts with palm, finger or trowel
- Please make the surface smoothly without any gaps so that you can put anti-corrosion tape easily
- When it contacts your skin and you have a rash, please wear protective gloves
- When it comes into your eyes, washing by a large amount of water, please contact a Doctor soon.

Things to be aware of when storing

- Please store it at the atmosphere of ventilation cool dark place that can avoid direct sunlight.
- Keeping the original package, please store it.
- Contact information... Technical support center T-FOX
E-mail : tfox@nitto.co.jp TEL : 0532-41-7838 FAX:0532-41-8446

Doc No. ANT-007-0E-1 2014/12/04 2/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.