

RF-224


RHINOZ FLEXI SAND



RHINOZ Flexi Sand is specially formulated as a decorative textured coating, without retaining water. The product gives natural effect of sand and stone particles, with a property of durability and long lasting colour. It can be applied easily with a trowel, ideal for interior and exterior floors and suitable for both new and existing concrete surface. It is good weather resistant, water & mild chemical resistant, covers cracks well and gives high strength.

- Aesthetic and durable natural stone
- Flexible and reduce cracking
- Water permeable, do not retain water
- Weather resistant, resistant to water and UV
- Prohibit growth of fungi and algae

Flexible and reduce cracking

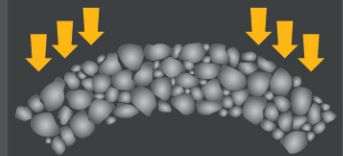

Tested Flexural Strength according to ISO-13700-4

PACKING SIZE : 28 kg/set

COVERAGE : 8 kg/m²/ 4-5 mm thickness

STORAGE : Store in a dry place with shelf life 1 year in the original unopened packing

TECHNICAL DATA

Base	: (A) Polyaspartic (B) Hardener (C) Sand
Appearance	: (A) Clear liquid (B) Yellowish liquid (C) Coloured sand
Density after mixing	: 1.6 g/cm ³
Mixing ratio	: A/B/C = 1/1/26 by weight
Dry time to touch	: 24 hours (Depending on thickness and ambient conditions)
Full cure time	: 7 days (Depending on thickness and ambient conditions)
Flexural strength	: 3.6 N/mm ² (ISO-13007-4)

APPLICATION

1. Surfaces must be levelled with at least 4 mm depth.
2. In case of installing G01 and G02 aluminium groove to create patterns, make 5-7 mm depth by 2 mm width floor grooves, clean the grooves, and apply **RHINOZ Alu-Fix** on the aluminium and the floor grooves. Place the aluminiums along the pattern and leave to dry for 30 minutes.
3. Apply **RHINOZ Flexi Sand Primer** on the surfaces then leave to dry for 1 - 2 hours.
4. Use Mixer to mix **RHINOZ Flexi Sand** part A and B at low speed for 1 - 2 minutes, then mix in Part C (Sand) and continue to mix for 2 - 3 minutes.
5. Pour **RHINOZ Flexi Sand** onto the desired area and use a trowel to spread and press until levelled. Leave it dry for 30 - 45 minutes.
6. Spray **RHINOZ Anti Stick** on the trowel and press down until smooth and firm within 1 hour after mixing.
7. Leave it to completely dry at least 24 hours before use.



RF-224



RHINOZ FLEXI SAND

- ◆ **FIRM** Strong Durable
- ◆ **FLEX** Flexible Reduce Crack
- ◆ **FLOW** Water Permeable No Water Retention
- ◆ **FAST** Less Step Less Time

SHADES



*Actual shades may differ due to the process of printing



PRODUCTS



RF-261 RHINOZ Flexi Sand Primer
Solvent based primer to increase adhesion and block moisture
Packing Size: 2 kg
Coverage 10-15 sqm/kg




RF-260 RHINOZ Alu-Fix
High strength epoxy adhesive for installing RHINOZ Aluminium Groove
Packing Size: 30 ml
Coverage 4-5 m/ 30 ml



RF-269 RHINOZ Anti Stick
Spraying solution to prevent sticking of RHINOZ Flexi Sand to equipment while adjusting its finishing look
Packing Size: 1 liter, 4 liter

AB-033 RHINOZ Aluminium Groove

Aluminium groove to finish the edge and divide the area to create patterns or designs
G01 T-Type: Exposing aluminium groove, can bend 360°
G02 U-Type: Exposing floor groove
G03 Edge-Type: To finish the slope edge
G04 Corner-Type: To finish vertical and horizontal corner

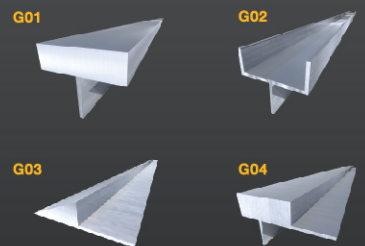

Manufactured by:
BLUE LABEL Co.,Ltd.
48/58 Moo 1 Ekachai rd. Khok-krabue, Mueang,
Samutsakhon, 74000 THAILAND
Tel: (+66) 34-494-774 www.rhinozinternational.com

[facebook](#) [RHINOZ International](#) [You Tube](#) bluelabel.innovation

Distributed by: