

<Filler materials for petrolatum type anticorrosion tape>

No.59M, No.59MS

Outline

No.59M is clayey material that short fiber and inorganic filler are added to petrolatum. Also, it is a supplementary material for No.59 tape.

There are block type of material called No.59M and sheet type of material called No.59MS.

Structure

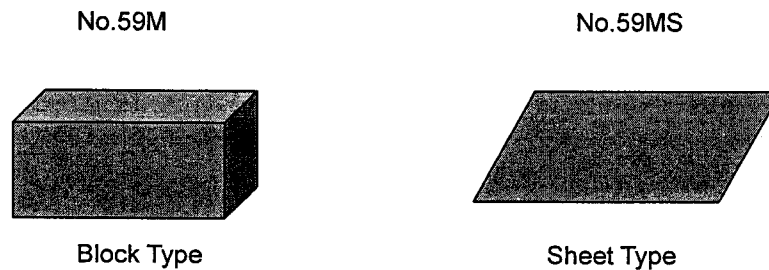


Fig-1 Product Structure

Application

- A gap filler materials for off-type steel tube like flange and valve
- Filler materials for uneven surface like bead part, corner part when putting it around the bottom edge of steel tank

Standard size and color

Table-1 Standard size

Product	Weight	Size	Q'ty per carton
No.59M	3kg	50mm x 190mm x 270mm	8
No.59MS	0.9kg	7mm x 250mm x 400mm	20

Doc No.ANT-003-E-1 2013/09/17 1/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Product Data Sheet

Characteristic

● General properties

Table-2 General properties

Item	Unit	Value	Test Method
Consistency	-	60	JIS K2200
Specific Gravity	-	1.26	JIS K6911
Weight reduction after heat	%	0.13	JIS A5752

Cautions Concerning Use

- Preparing adequate size for target construction structure, please fill this product out into uneven surface and narrow area by using your hand finger, palm or flat plate.
- Please make the surface smooth not to get a gap so that this product gets easy to put.
- As there is a possibility that you get skin rash when you contact this tape, please wear protect glove.
- If this product enters into your eyes, washing your eyes with a lot of amount of water, please contact a doctor.
- Please store this product in a cool and dark place where direct sunlight does not come
- Please store this product, keeping original packaging

Doc No.ANT-003-E-1 2013/09/17 2/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.